




Connecting Strength

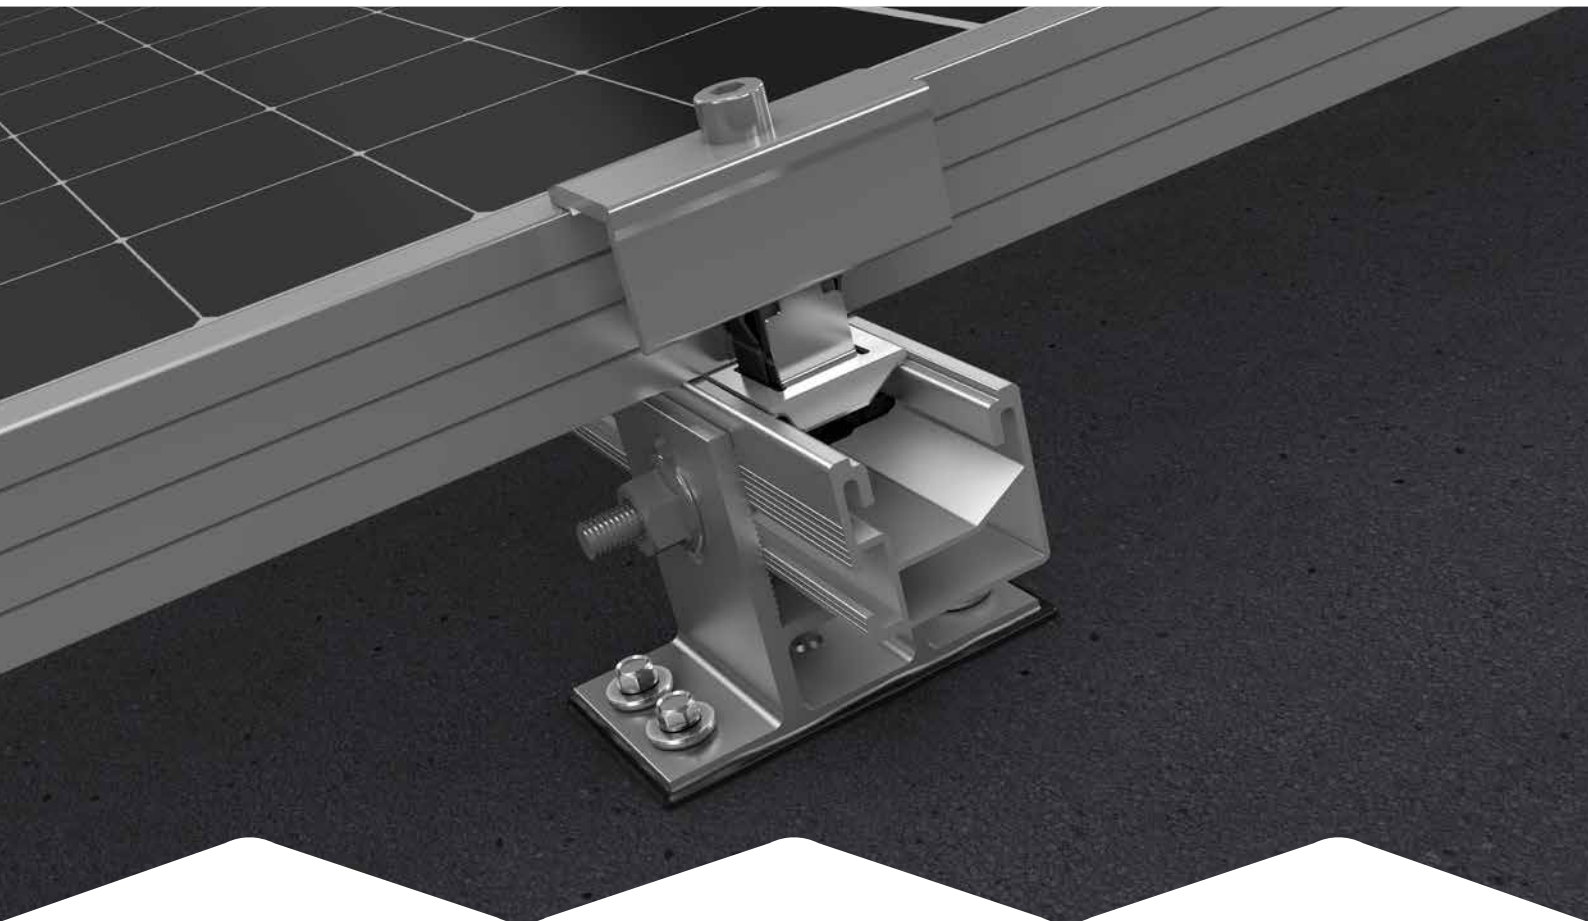

Assembly instructions

SingleRail System

with SpliceFoot

Content

• Tools overview	3
• General safety information	4
• The following guidelines apply	5
· Planning with K2 Base	5
· Roof requirements	5
· Structural requirements	5
· Important mounting instructions	5
• Components	6
• Assembly	8
· Preparation	8
· Deck attachment	9
· Rafter attachment	10
· Thermal separation	14
• Module frame earthing with TerraGrif	15
· TerraGrif QL oder K2SZ	15


Quality tested - several certifications

K2 Systems stands for secure connections, highest quality and precision. Our customers and business partners have known that for a long time. Independent institutes have tested, confirmed and certified our capabilities and components.

Please find our quality and product certificates under:

k2-systems.com

Tools overview




SW 8 mm




SW 13 mm



6 mm



6 mm




6 - 30 Nm
(4.5 - 22.2 lb-ft)



6 mm



SW 13 mm



≥ 3.0 m



≥ 6.0 m

General safety information

Please note that our general mounting instructions must be followed at all times and can be viewed online at k2-systems.com.

- The equipment may only be installed and operated by qualified and adequately trained installers.
- Prior to installation, ensure that the product complies with on-site static loading requirements. For roof-mounted systems, the roof load-bearing capacity must always be checked.
- National and local building regulations and environmental requirements must be adhered to.
- Compliance with health and safety regulations, accident prevention guidelines and applicable standards is required.
 - Protective equipment such as safety helmet, boots and gloves must be worn.
 - Roofing works must be in accordance with roofing regulations utilising fall protection safeguards when eaves height exceeds 3 m.
 - At least two people must be present for the duration of the installation work in order to provide rapid assistance in the event of an emergency.
- K2 mounting systems are continuously developed and improved and the installation process may thereby change at any time. Prior to installation consult our website at k2-systems.com for up-to-date instructions. We can send you the latest version on request.
- The assembly instructions of the module manufacturer must be adhered to.
- Equipotential bonding/grounding/earthing between individual parts is to be performed according to country specific standards, as well as national laws and regulations.
- At least one copy of the assembly instructions should be available on site throughout the duration of the installation.
- Failure to adhere to our general safety and assembly instructions and not using all system components, K2 is not liable for any resulting defects or damages. We do not accept liability for any damage resulting in the use of competitor's parts. Warranty is excluded in such cases.
- German law shall apply excluding the UN Convention on CISG. Place of venue is Stuttgart. Our General Terms of Business apply.
- If all safety instructions are adhered to and the system is correctly installed, there is a product warranty entitlement of 12 years! We strongly recommend reviewing our terms of guarantee, which can be viewed at k2-systems.com. We will also send this information on request.
- Dismantling of the system is performed in reverse order to the assembly.
- K2 stainless steel components are available in different corrosion resistance classes. Each structure or component must be carefully checked for possible corrosion exposure.

The following guidelines apply



The SingleRail system with SpliceFoot can be used without further testing by K2 Systems in the following standard conditions. The system is also suitable for higher requirements. However, if a value exceeds the standard conditions, please contact K2 Systems.



Planning with K2 Base

We recommend our free online software K2 Base for the planning. In five steps, you can plan the right assembly system and get a construction recommendation, parts list and the structural analysis report. Simply register and start planning:

base.k2-systems.com



Roof requirements

- Bitumen sheets and Bitumen shingles
- Roof pitch regularly: 5 - 75°
- Minimum thickness for deck attachment
≥ 15 mm for OSB and ≥ 21 mm for solid wood
- Deck attachment: The resistance values are based on wood material quality of C24 (> 350 kg/m³) or for OSB ≥ 550 kg/m³
- Rafter attachment: The resistance values are based on wood material quality of C24 (> 350 kg/m³)
- Installation directly on the insulation is not possible



Structural requirements


- Sufficient holding force of the roof boarding (OSB or solid wood) on the roof structure.
- The static verification of components is automatically calculated for each location using our Base planning software



Important mounting instructions


- On-site general standards and regulations for lightning protection must be observed and consultation with a specialist to create a lightning protection concept is recommended (use lightning protection clamp if necessary).
- We recommend a thermal separation after maximum of 15 m.
- The SingleRail 36/50 RailConnector must always be positioned between two SpliceFeet; meaning, a cantilever extension at the rail edge outside the last SpliceFoot is not permitted.
- A minimum mounting distance of 50 mm from the end of the rail / rail joint to the module frame.
- Rail cut SingleRail ≥ 700 mm
- Tightening torque for all module clamps: 16 Nm
- Adhere to module manufacturer recommendations for clamping area and module installation (see module manufacturer instructions).
- The installation temperature of the SpliceFoot must be between 5 °C and 30 °C.
- The bitumen must be cleaned at the bonding point before installing the SpliceFoot.
- Do not step on the SpliceFoot or rails, as these are not climbing assists!

Components

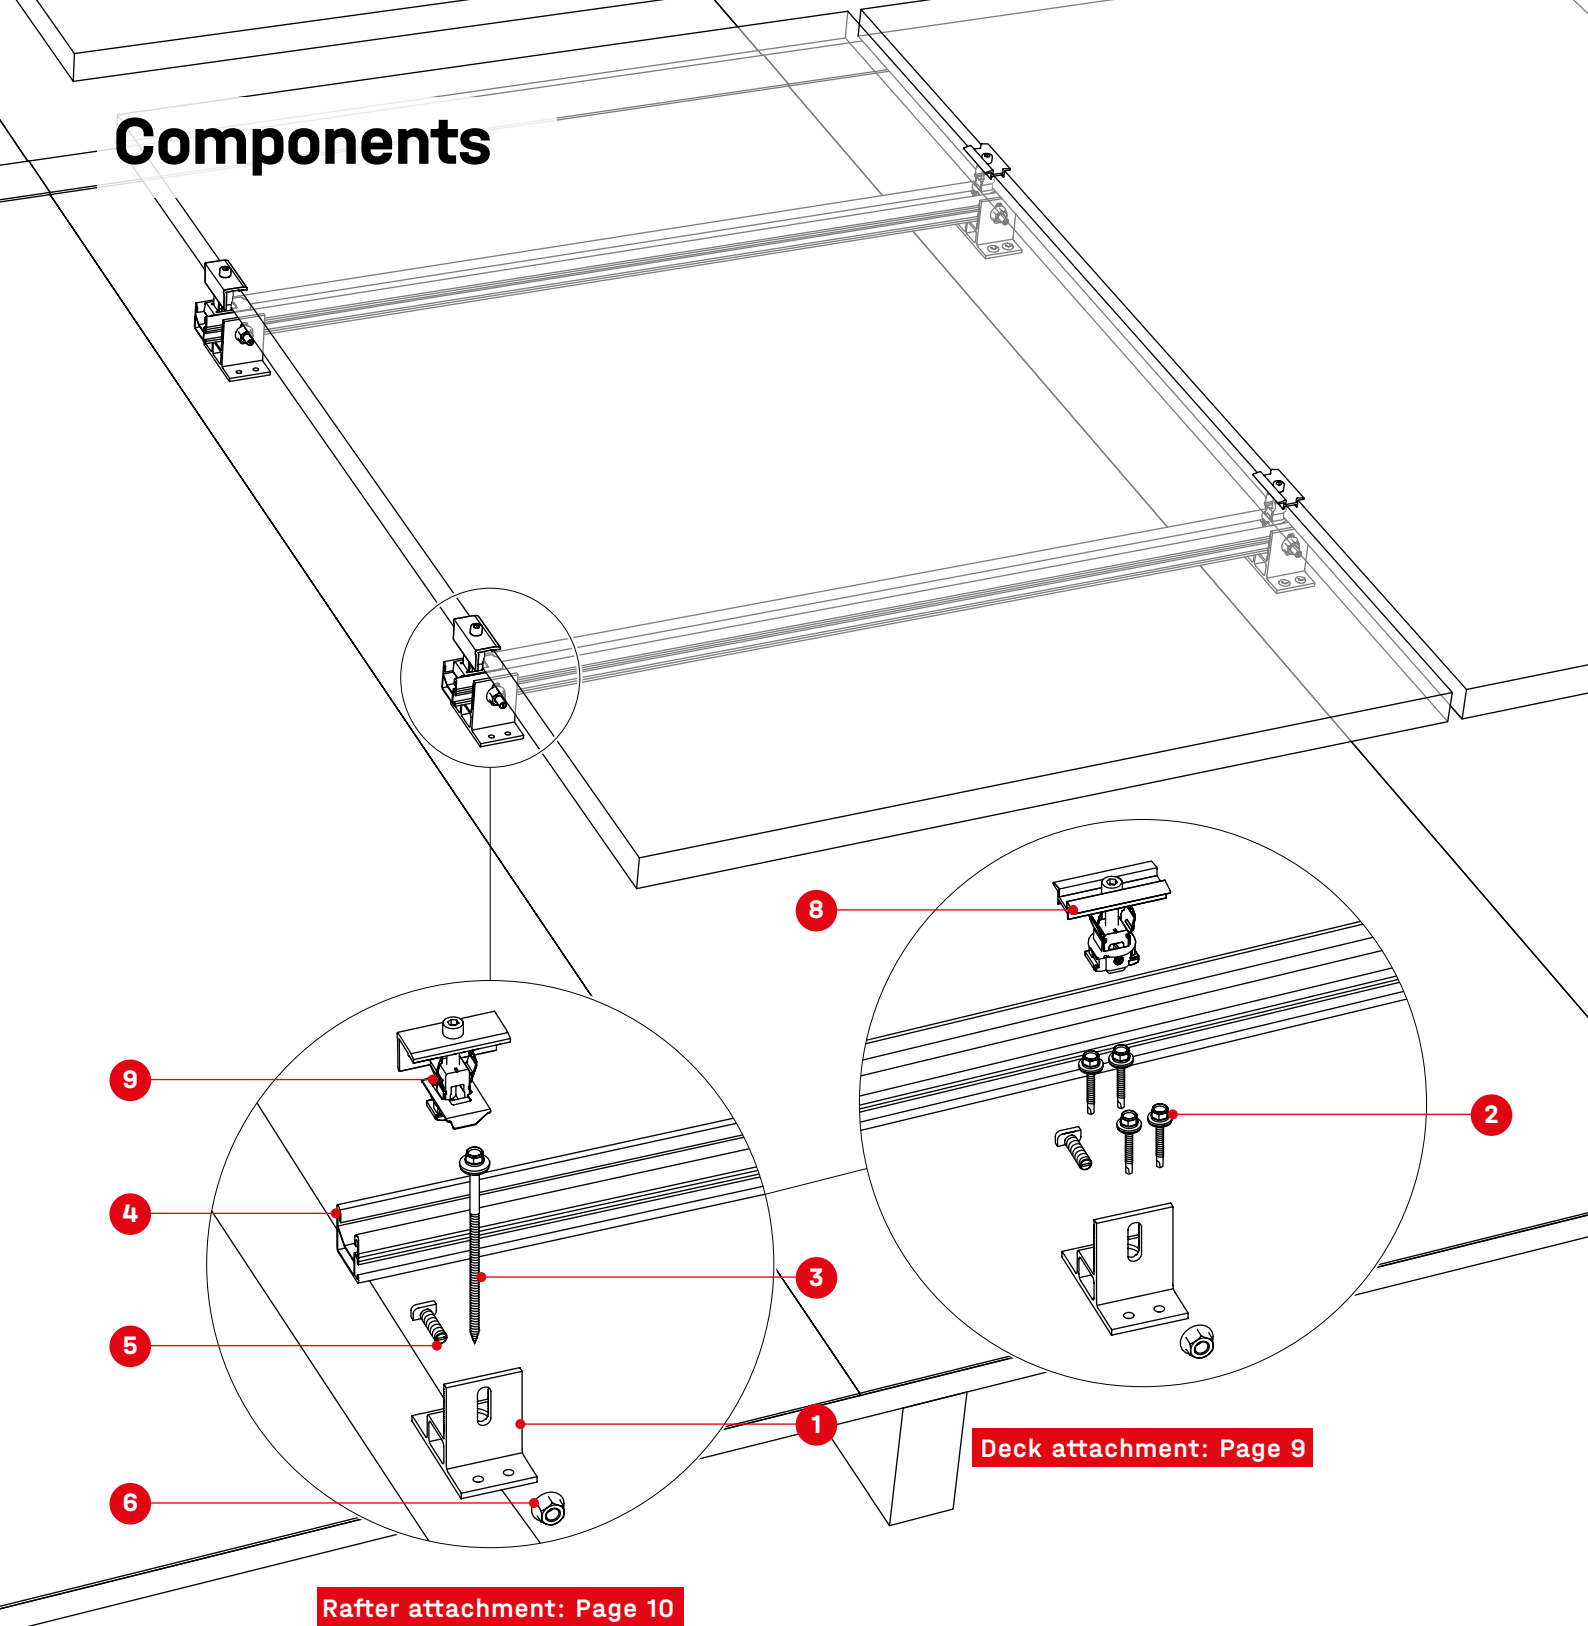

1

2003393
SpliceFoot



2

2003064
Drilling screw
6 × 75




3


2003527
Drilling screw
6,8 × 140




4

Item no. project specific
SingleRail 36, 50 or 36 Light

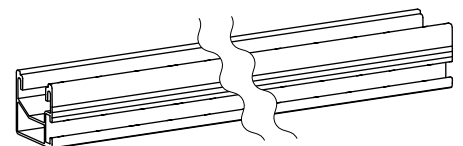

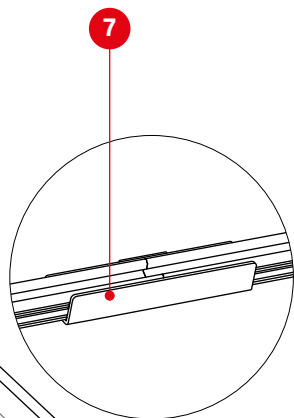

- 7** 2003605/2001976
SingleRail 36/50 RailConnector
SingleRail 36/50 Connector Set

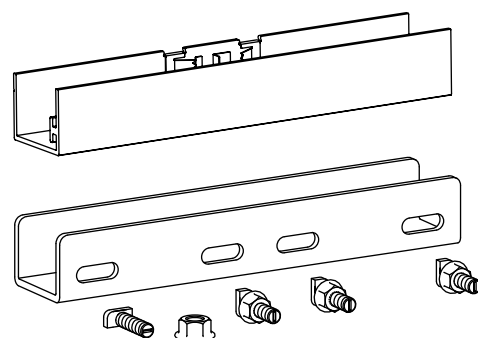


- 5** 1002387
T-Bolt 20/12



- 6** 1000043
Hexagon Flange nut with serration M 8



- 8** Item no. project specific
Module middle clamps




K2 Clamp MC
25 - 40




XS Clamp MC
30 / 33-35

- 9** Item no. project specific
Module end clamps



K2 Clamp EC
25 - 40



XS Clamp EC
30 / 33 / 35



Optional

- 2004231 2001881
TerraGrif QL TerraGrif K2SZ





Assembly



Preparation

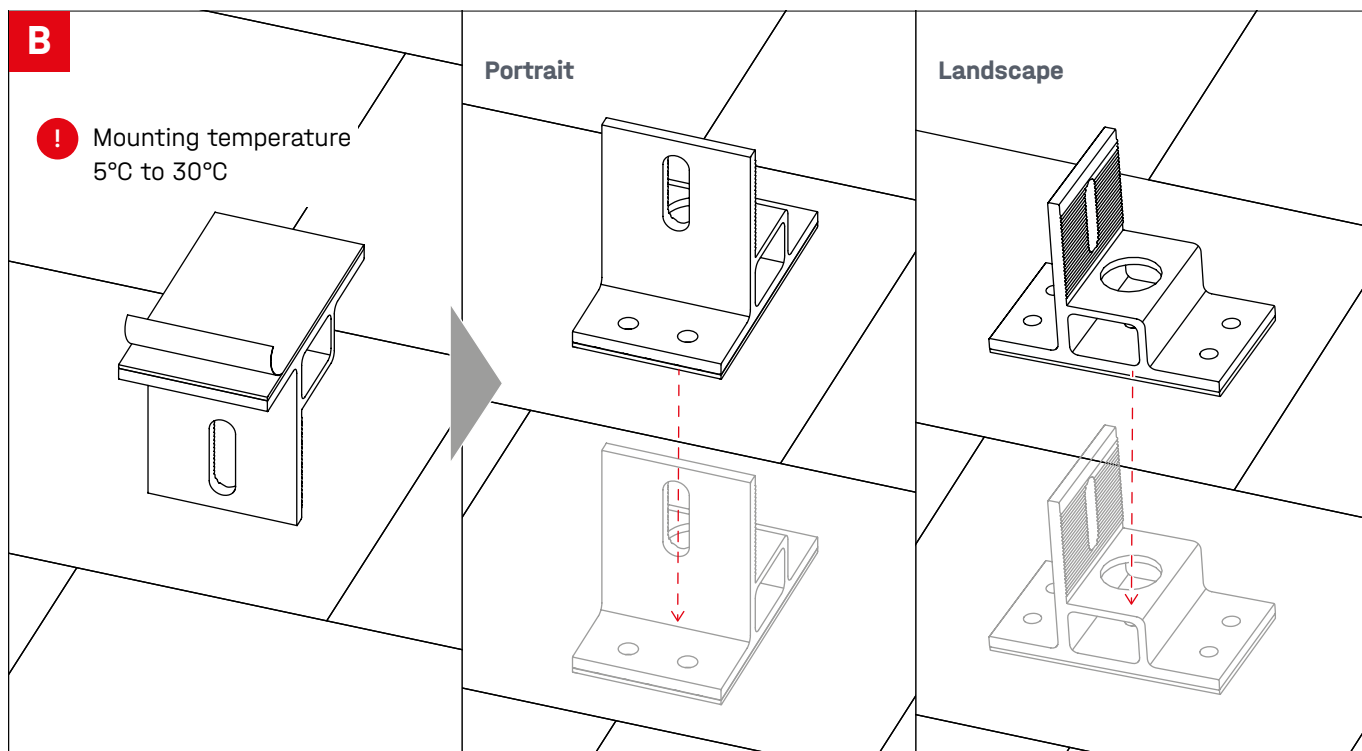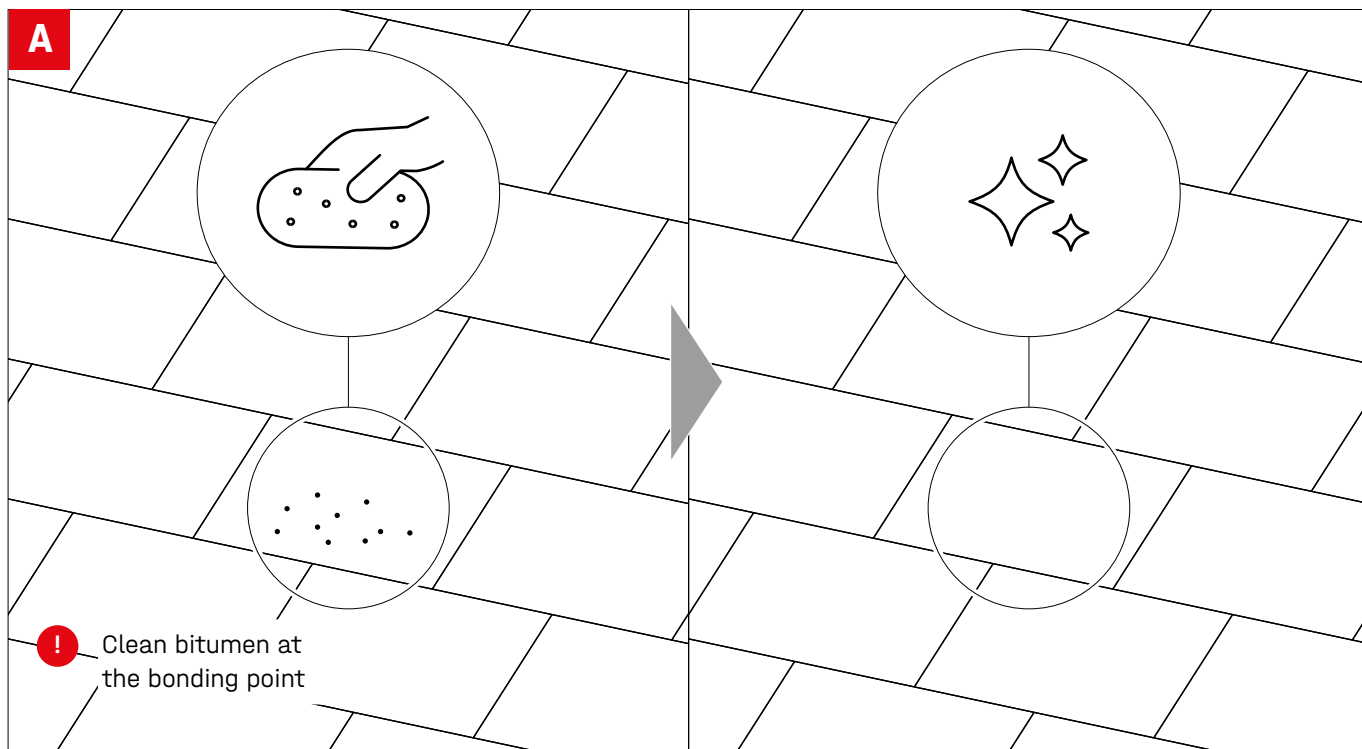


Deck attachment

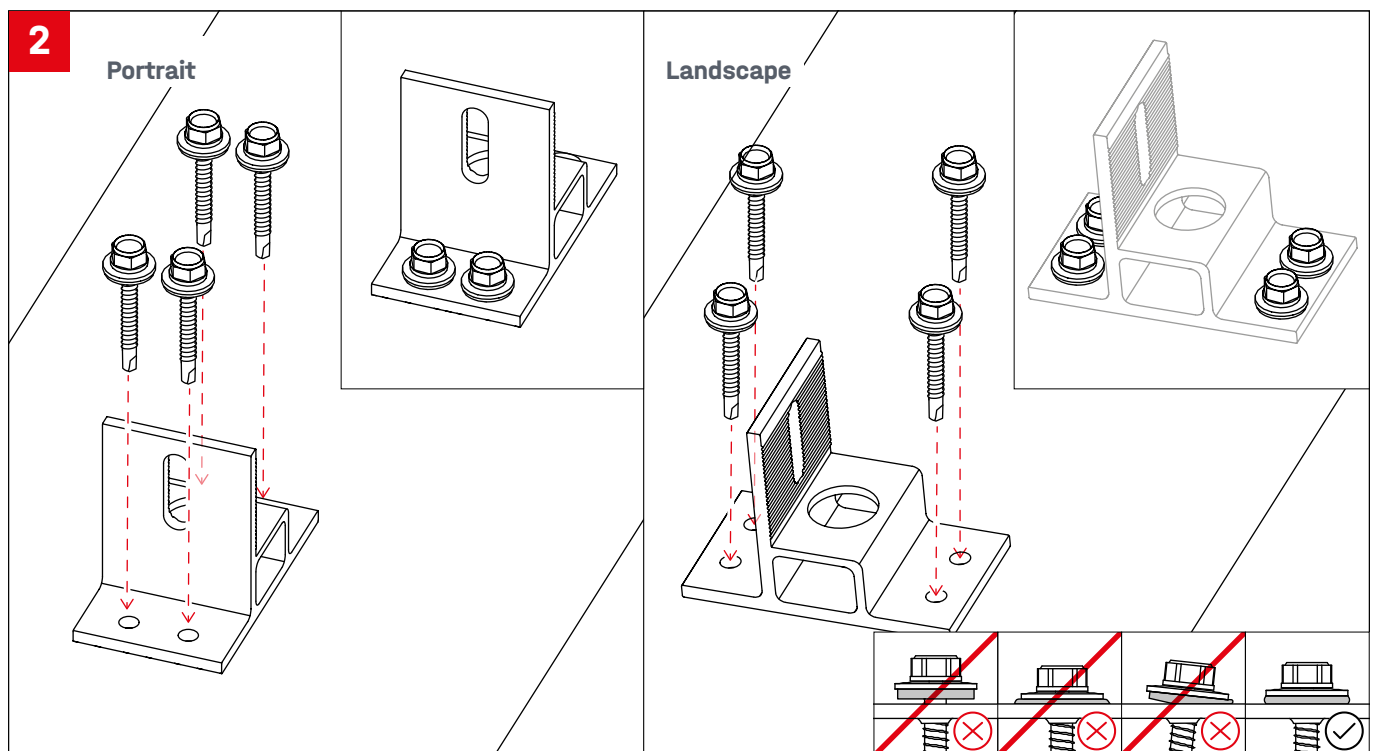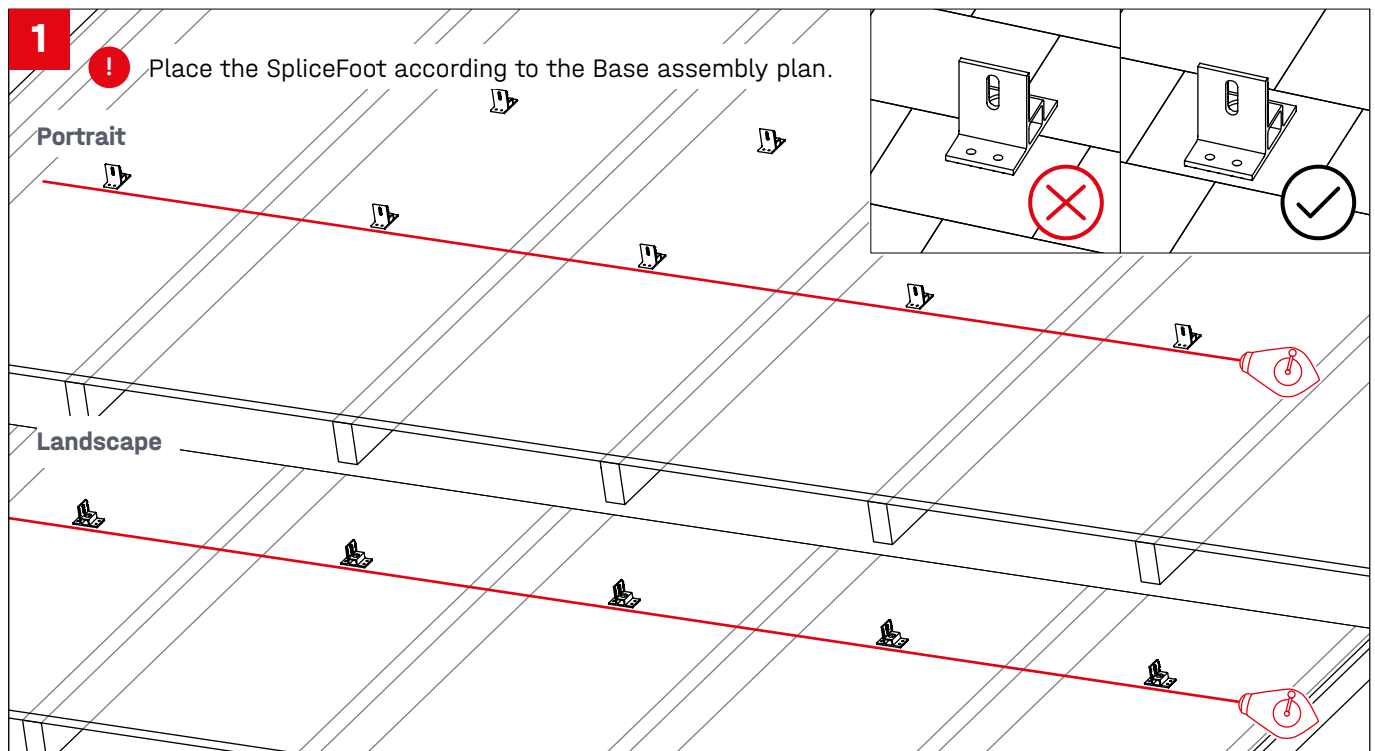


Rafter attachment

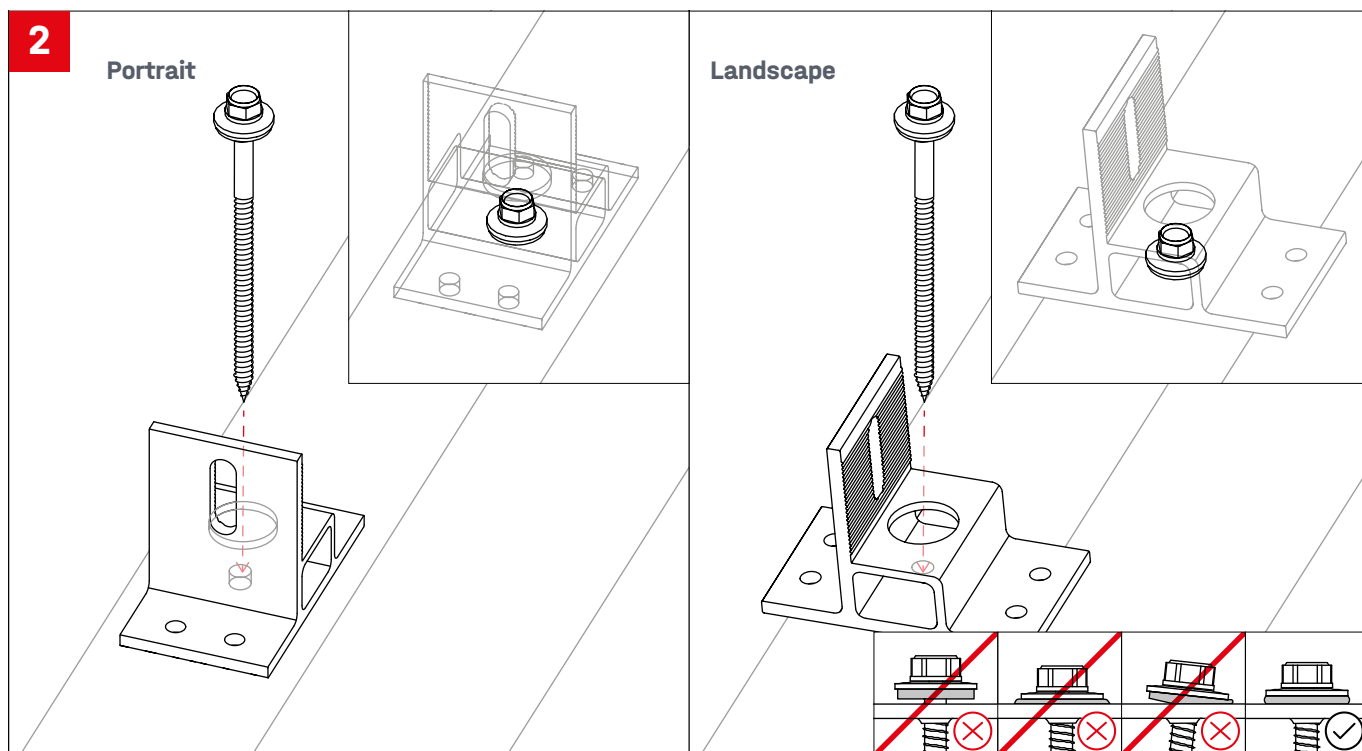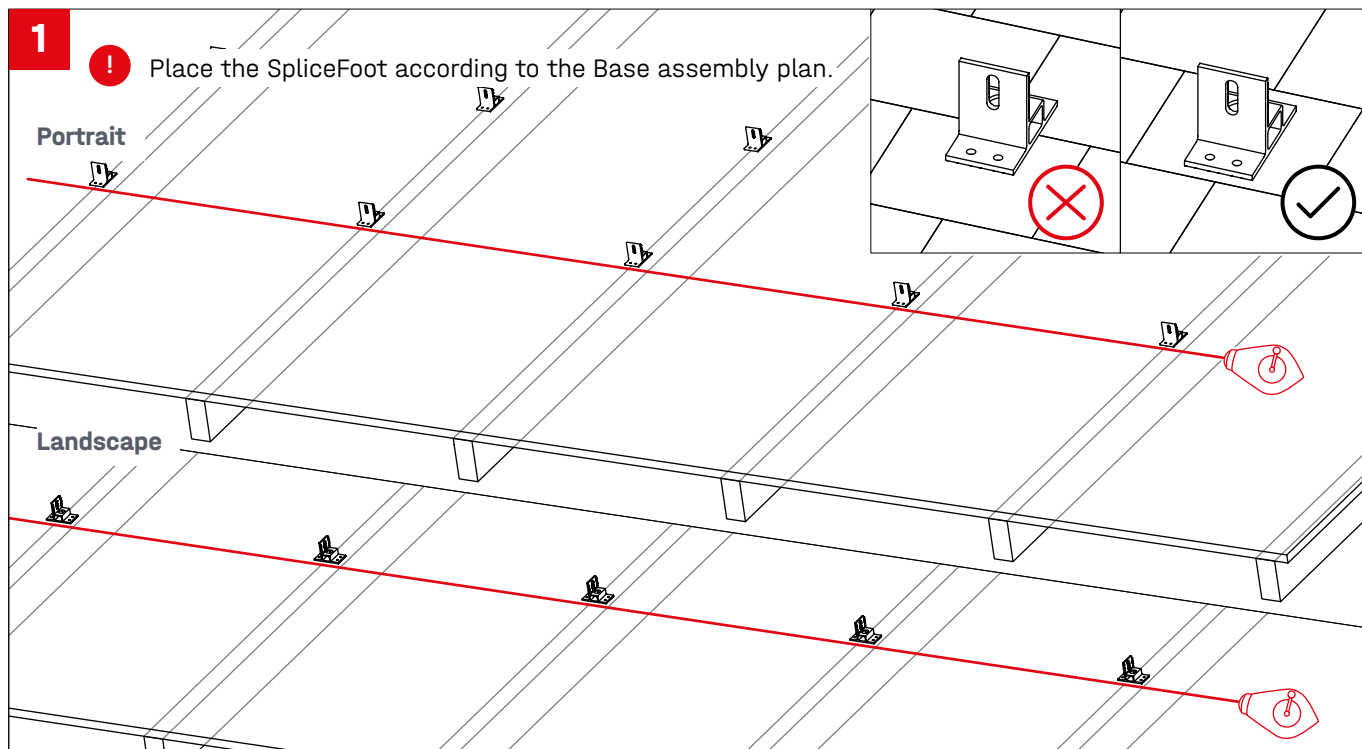


Portrait

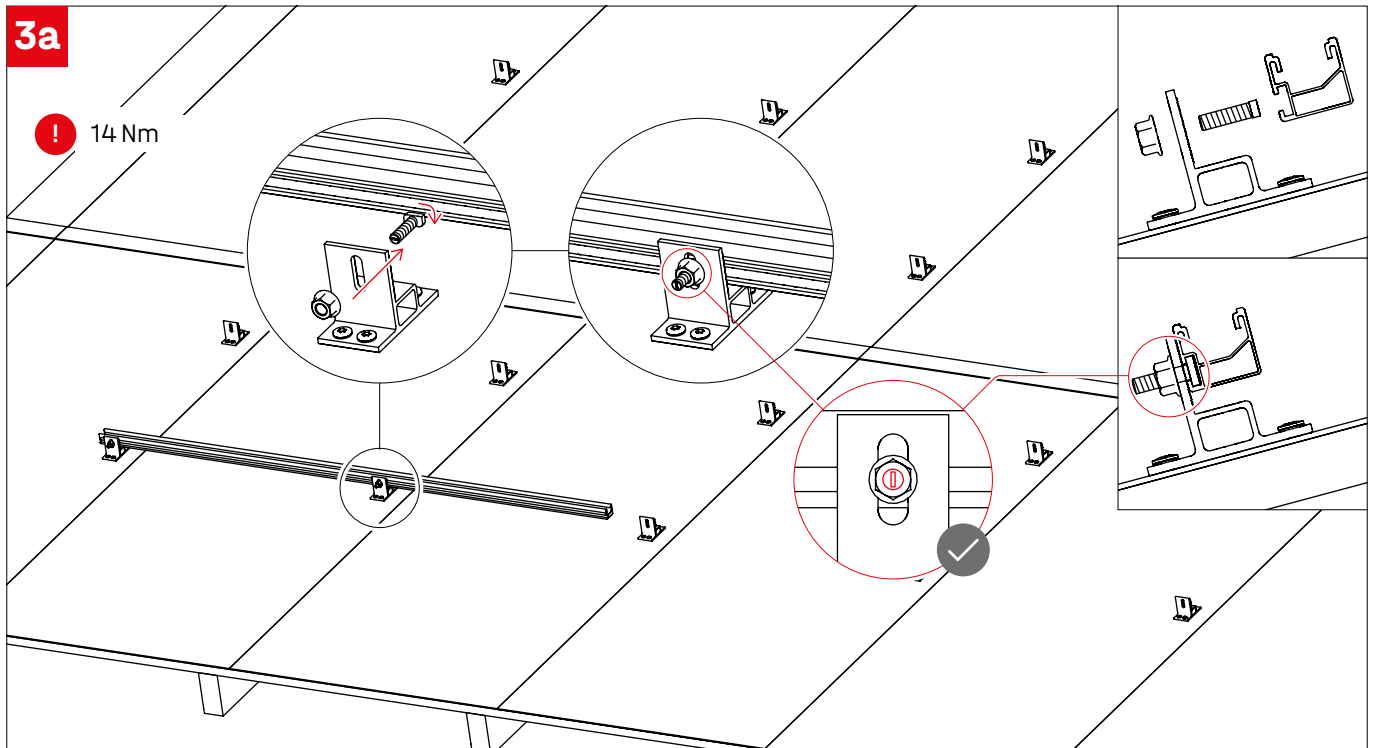


Landscape


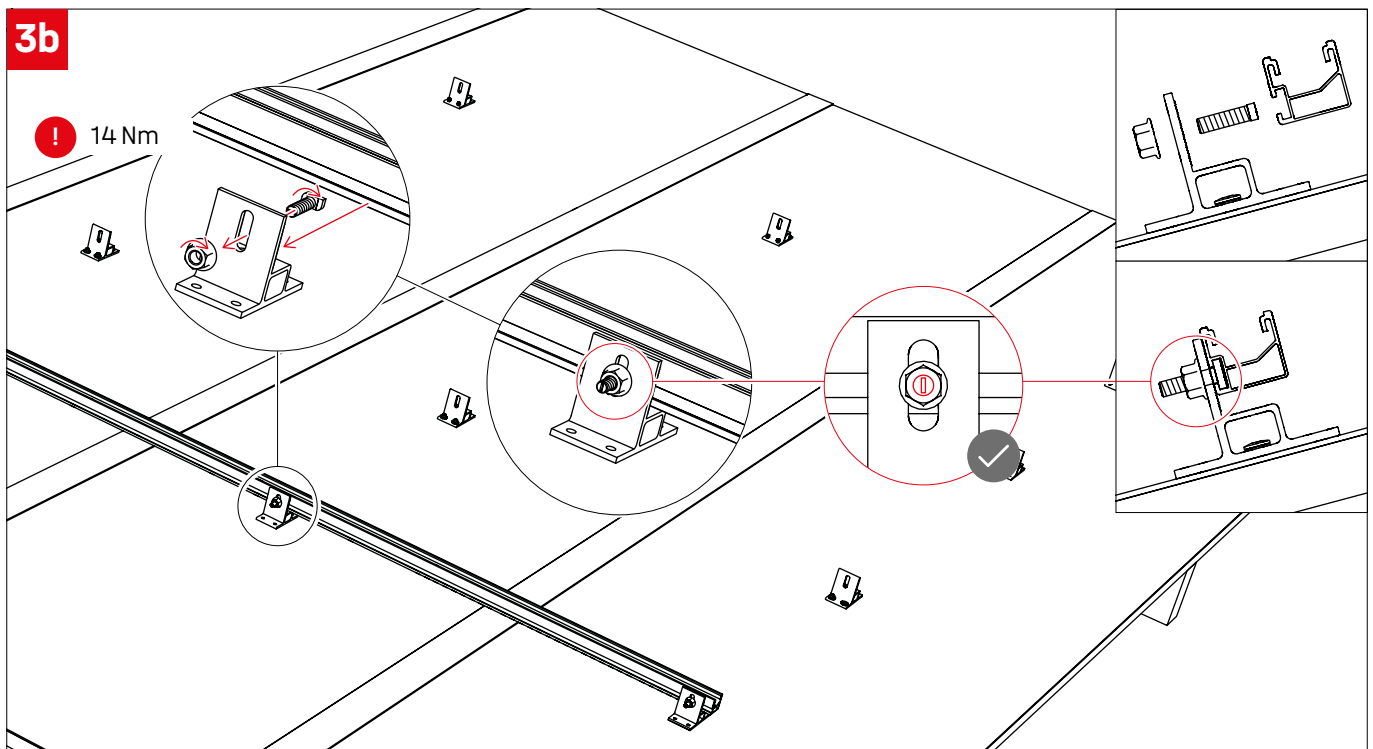


4a SingleRail 36/50 RailConnector

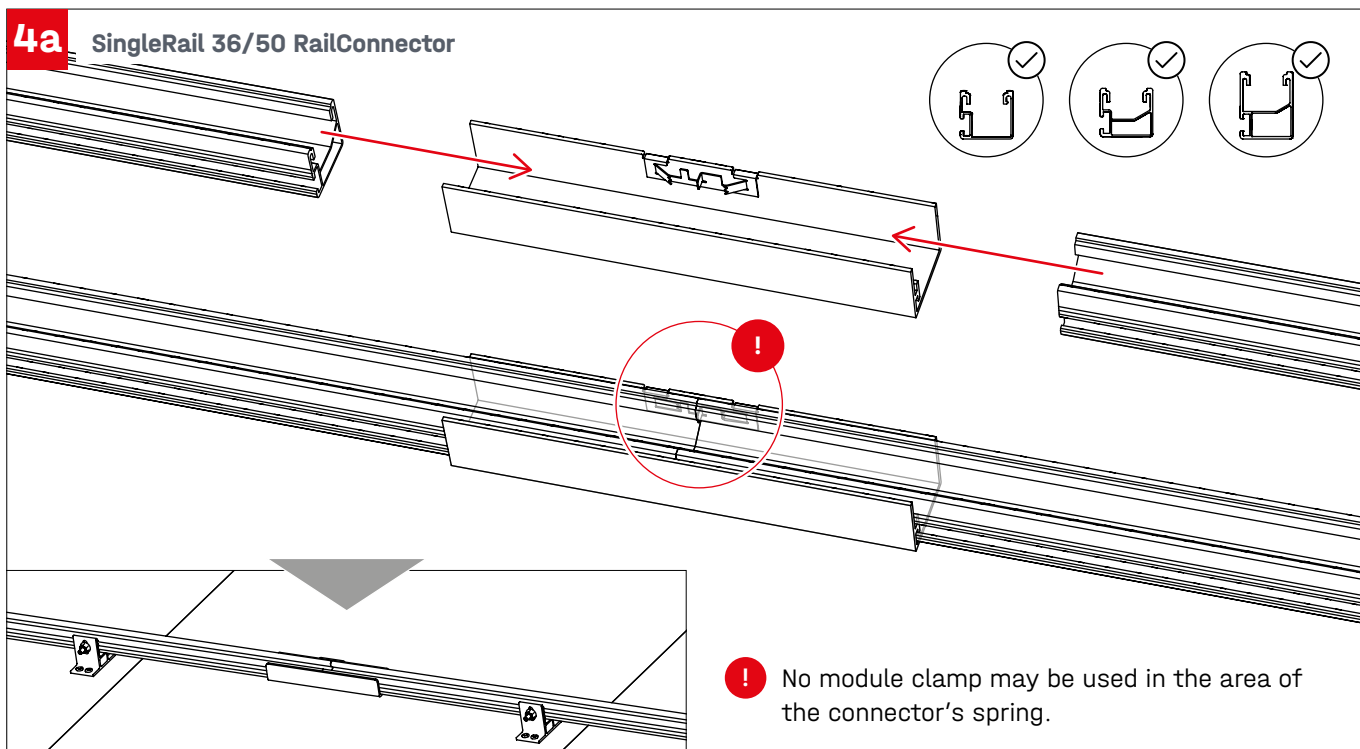


4b SingleRail 36/50 Connector Set

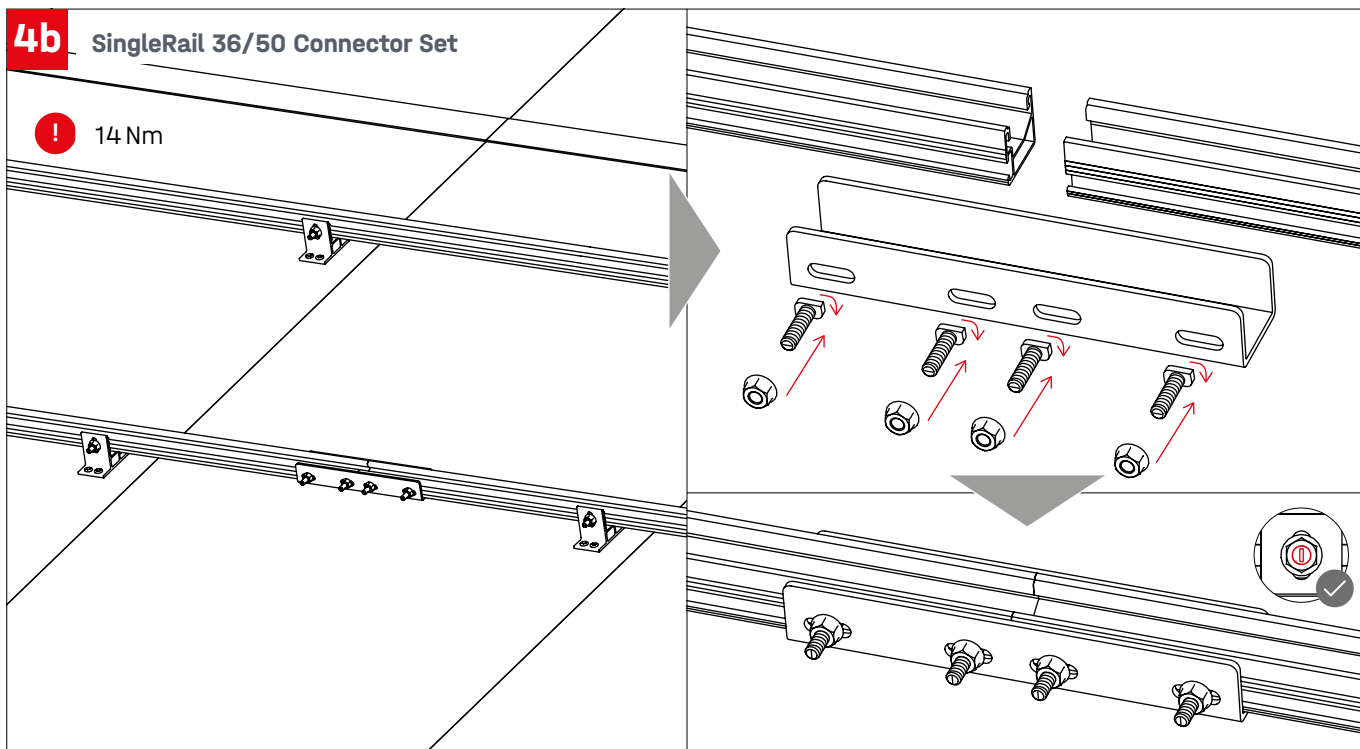

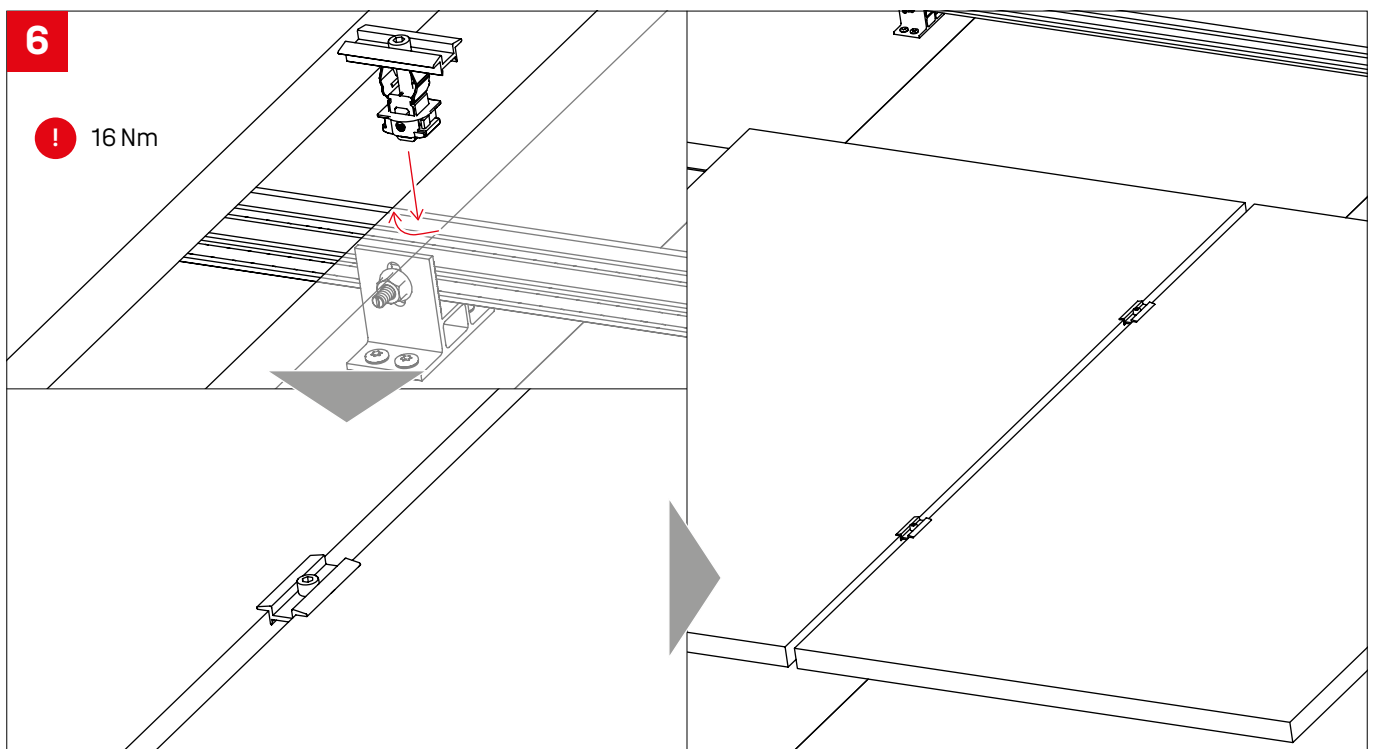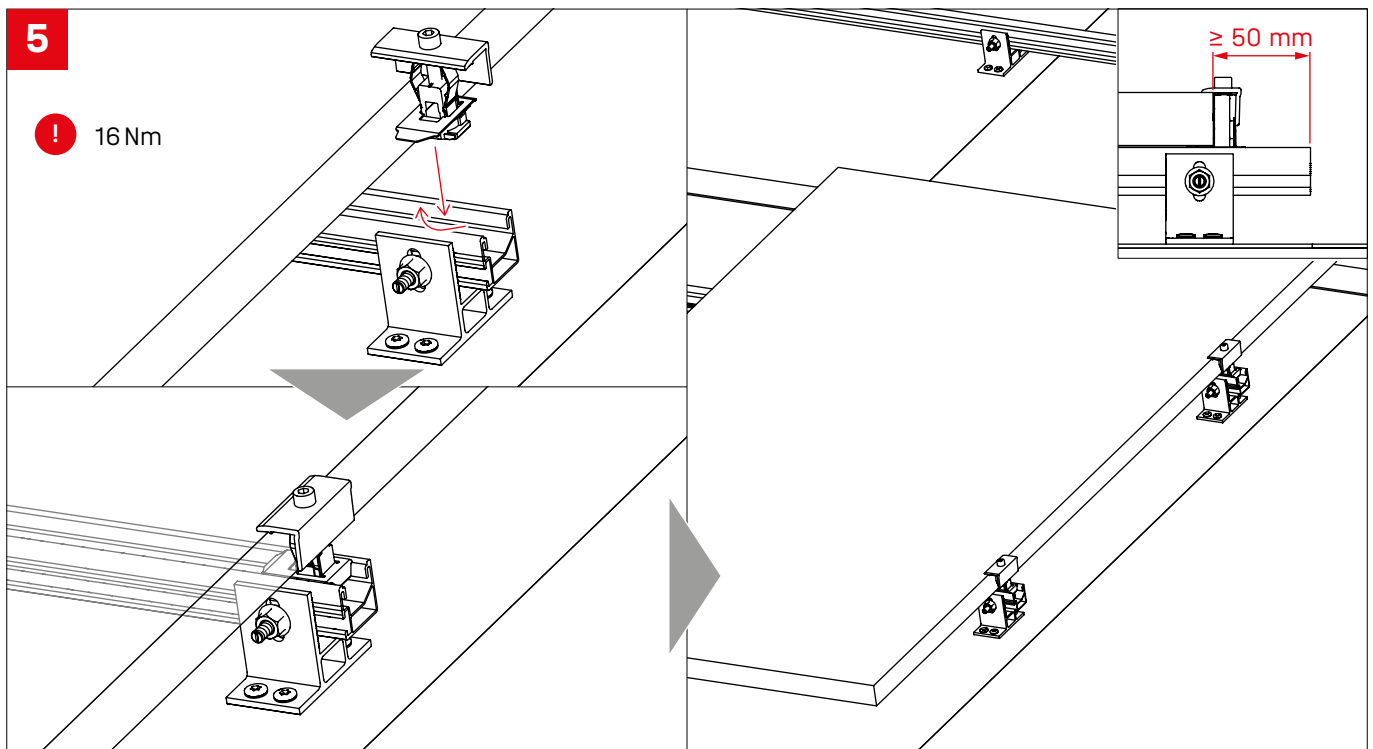


Thermal separation

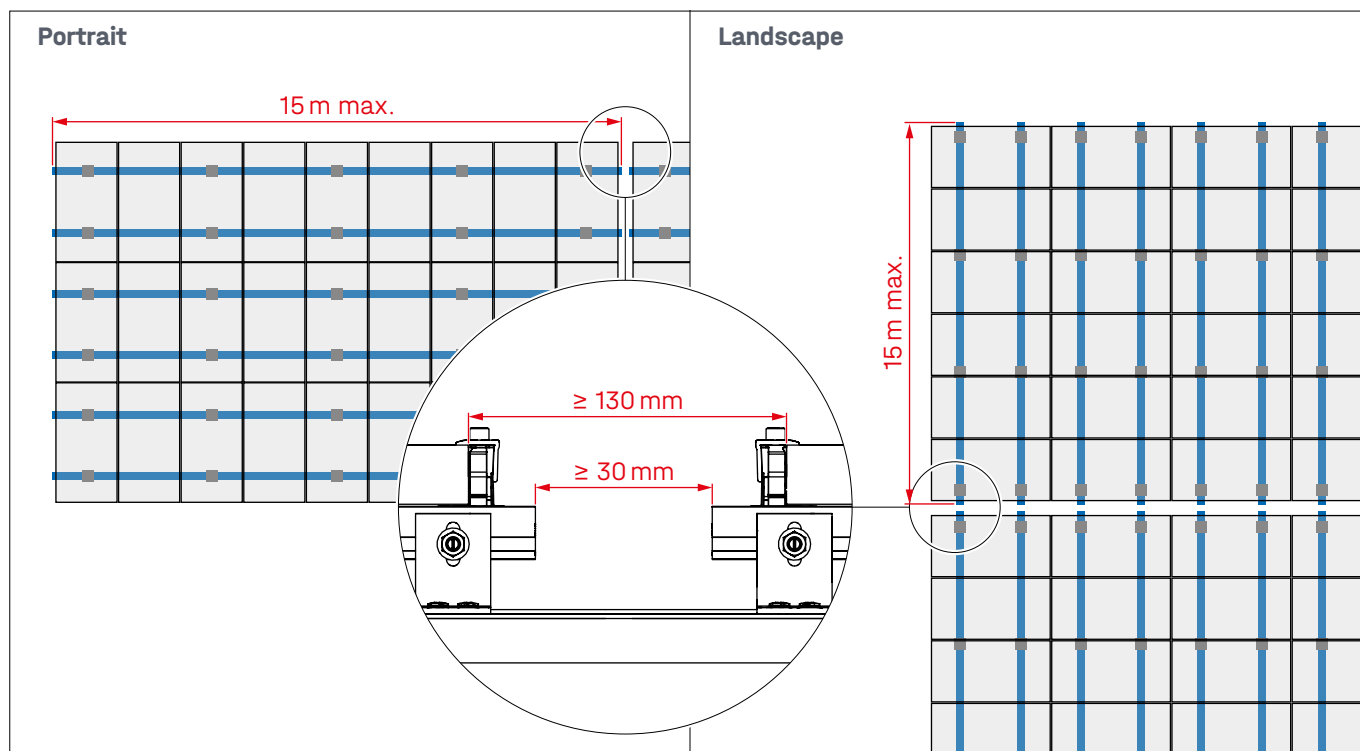

Module frame earthing with TerraGrif



TerraGrif QL oder K2SZ

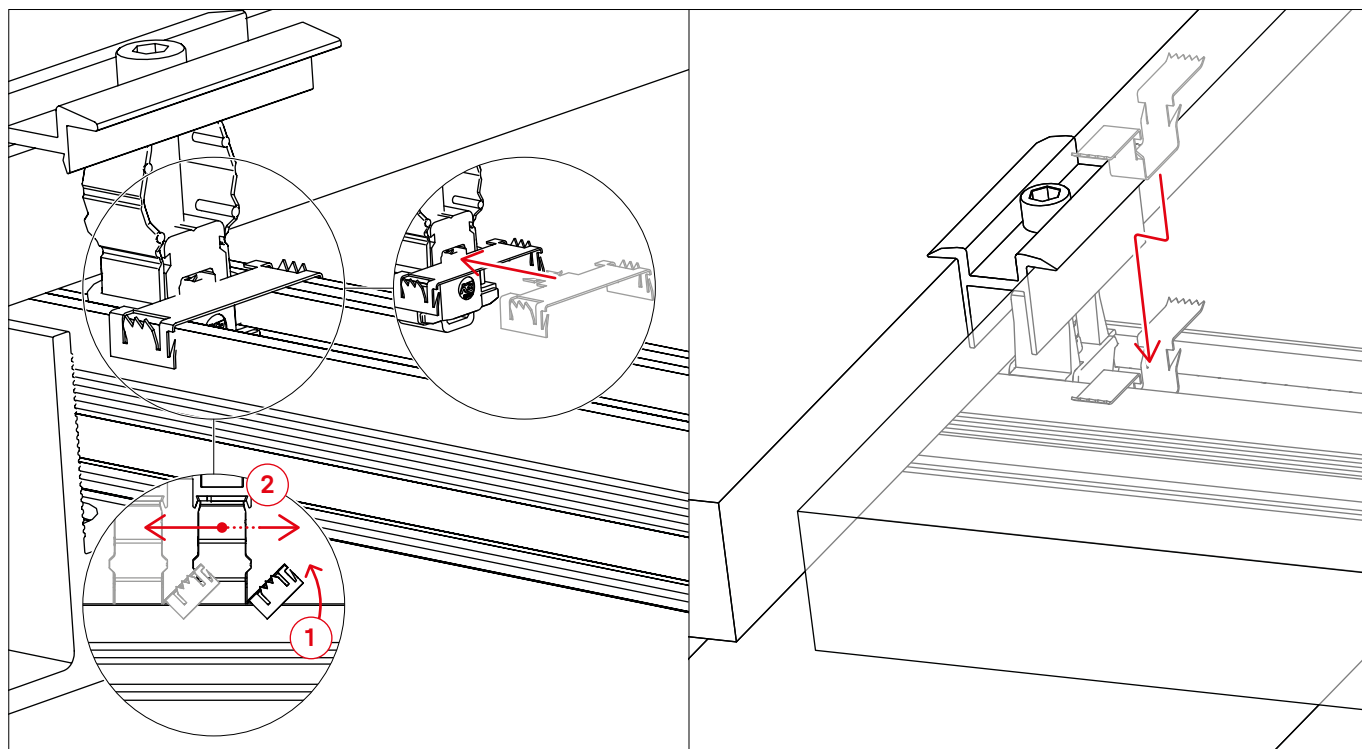



Connecting Strength

Thank you for choosing a K2 mounting system.

Systems from K2 Systems are quick and easy to install. We hope these instructions have helped. Please contact us with any questions or suggestions for improvement. Our contact data:

- k2-systems.com/en/contact
- **Service Hotline: +49 7159 42059-0**

Our General Terms of Business apply. Please refer: k2-systems.com

K2 Systems GmbH

Haldenstraße 1 · 71272 Renningen · Germany
+49 (0) 7159 - 42059 - 0 · info@k2-systems.com · k2-systems.com

SingleRail SpliceFoot Assembly EN V3 | 0726 · Subject to change · Product illustrations are exemplary and may differ from the original.